

## Stand-up merry-go-round KO142K (mean 1,4 m) - metal


Product type KO-142K-10

### Basic information

Age category	2 - 15 years
Minimum area	5,5 m x 5,5 m
Equipment measurements	1,32 m x 1,32 m x 0,8 m
Free fall height:	0,2 m
Load capacity:	270 kg
Max. number of users:	5
Fall zone: EN 1177	Grass surface
Designation:	exterior
Availability of spare parts:	supplied by the
Certificate of Compliance:	ČSN EN 1176 - 1, 5

### Material

Metal units - structural steel, non-slip sheet metal

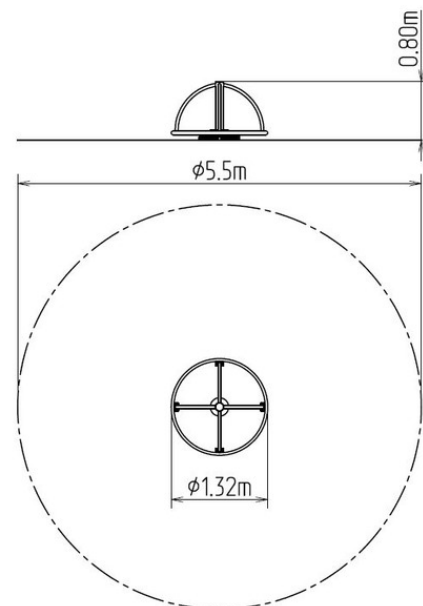

### Finish

Duplex powder coated with coat curing  
Hot-dip galvanizing

### Description

The merry-go-round is welded from steel pipes and square profiles. All metal units are protected against corrosion by zinc coating, resulting in a very prolonged service life of the workout elements or duplex powder coated with coat curing according to RAL to prevent corrosion. The structures are fixed in a concrete bed. The roundabout is constructed with durability and long life in mind. The platform is made from a non-slip sheet metal. All fastening material is galvanized or stainless steel.