

Climbing set SS306D

Product type 9SS-306D-2001

Basic information

| | |
|------------------------------|-------------------------------------|
| Age category | 3 - 15 years |
| Minimum area | 6,5 m x 5,5 m |
| Equipment measurements | 2,5 m x 1,3 m x 2 m |
| Free fall height: | 2 m |
| Load capacity: | 324 kg |
| Max. number of users: | 6 |
| Fall zone: EN 1177 | Rubber or gravel, 36 m ² |
| Designation: | exterior |
| Availability of spare parts: | supplied by the |
| Certificate of Compliance: | ČSN EN 1176 - 1 |

Material


Wooden units - glued wooden supports
Metal units - structural steel

Finish

Impregnation and coating with a triple layer of lacquer
Duplex powder coated with coat curing
Hot-dip galvanizing

Description

The climbing set support structure is made from 100 x 100 mm thick glued wooden supports. This solution ensures maximum protection against cracking, which is common for products made from solid wood. The wooden supports are impregnated and coated with a triple layer of lacquer, which meets the terms and conditions of the EN71/3 Standard (safe for children's toys). The structures are anchored into the ground in steel plates, which are protected against corrosion by hot-dip galvanizing and fixed in a concrete bed. The anchors are fastened to the play unit with bolts and their structure ensures that they are not in direct contact with the ground. All other metal units are zinc coated and KOMAXIT powder coated according to the RAL. All fastening material is galvanized or stainless steel.

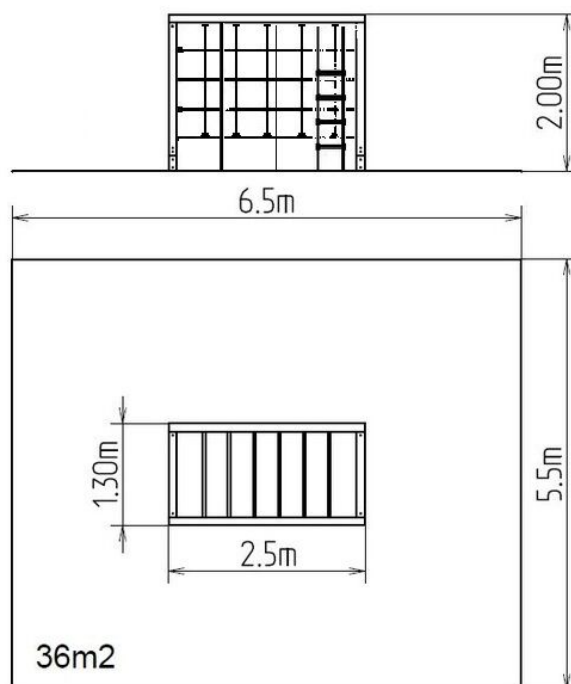

Equipment

2x Swedish ladder, monkey bars.